TEST-POOL-01 (assessment test, not a real project)

TEST-DB-POOL

Customer	TEST customer
Job number	TEST-0001
Issued under	iec-default
Design rules	software defaults, not confirmed by the company's engineers

Company	Project	Job number	Board	Title of page	Rev.
	TEST-POOL-01 (assessment t…	TEST-0001		**Title page**	
Date	**Drawn**	**Checked**	**Approved**	**Page**	
				1 of 10	

Page	Title	Board
1	Title page	
3	Main power	TEST-DB-POOL
4	Distribution loads	TEST-DB-POOL
5	Distribution loads	TEST-DB-POOL
6	Design notes	TEST-DB-POOL
7	Layout	TEST-DB-POOL
8	Terminals	TEST-DB-POOL
9	Cable list	
10	Parts list	

Company	Project	Job number	Board	Title of page	Rev.
	TEST-POOL-01 (assessment t…	TEST-0001		**Table of contents**	
Date	Drawn	Checked	Approved	Page	
				2 of 10	

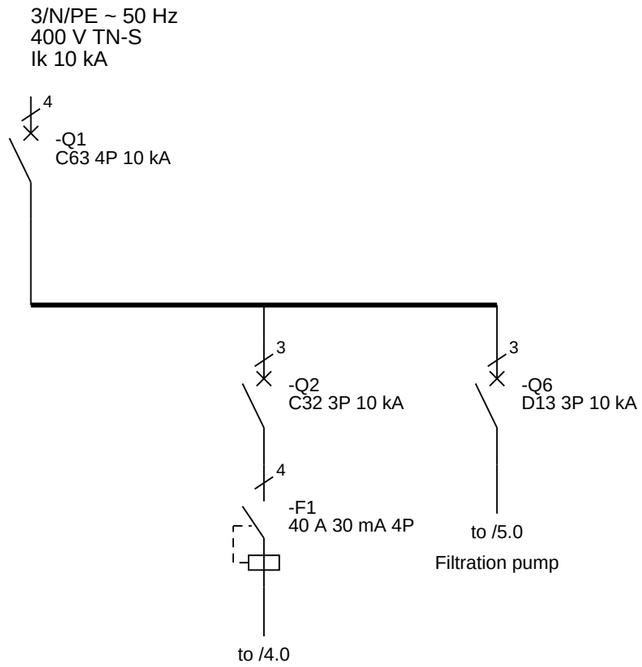

Company	Project	Job number	Board	Title of page	Rev.
	TEST-POOL-01 (assessment t…	TEST-0001	TEST-DB-POOL	**Main power**	
Date	**Drawn**	**Checked**	**Approved**	**Page**	
				3 of 10	

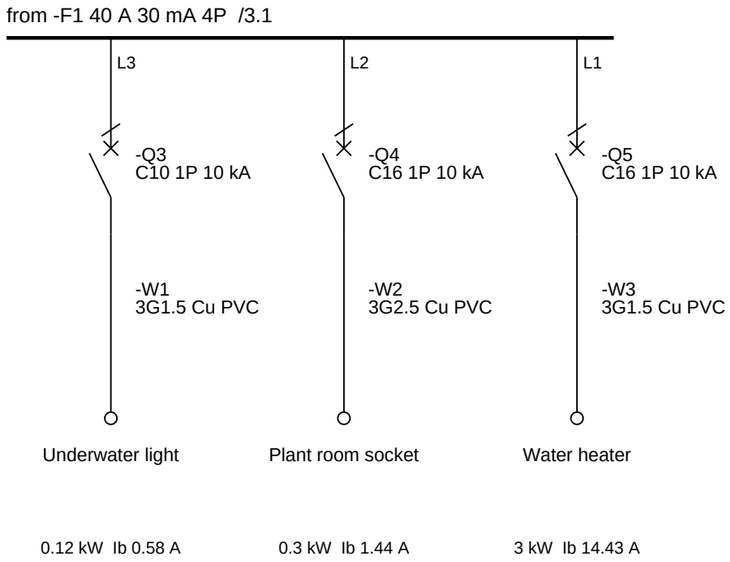

Company	Project	Job number	Board	Title of page	Rev.
	TEST-POOL-01 (assessment t…	TEST-0001	TEST-DB-POOL	**Distribution loads**	
Date	Drawn	Checked	Approved	Page	
				4 of 10	

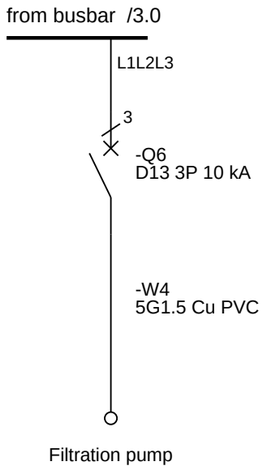

Company	Project	Job number	Board	Title of page	Rev.
	TEST-POOL-01 (assessment t…	TEST-0001	TEST-DB-POOL	**Distribution loads**	
Date	Drawn	Checked	Approved	Page	
				5 of 10	

No.	Note
1	Group 1 breaker raised to 32 A, 1.6 x the 16 A breaker after it, for discrimination.
2	Phase imbalance 52.3 % exceeds the company's 10 %: the loads cannot be spread more evenly as given.
3	Incomer raised to 63 A, 1.6 x the 32 A breaker after it, for discrimination.
4	Breakers are rated for at least 10 kA breaking capacity against 10 kA prospective at the board; each RCCB's conditional short-circuit current with the breaker ahead of it must reach it too.
5	Leave 1 spare outgoing ways (20 %).
6	Loads without a power factor were taken at cos phi 0.9.
7	Each breaker is rated at least 1.6 x the largest breaker after it, so they discriminate on overload. On short circuit, miniature breakers discriminate only up to the upstream breaker's instantaneous trip (about 5 x In for curve C); where total selectivity is required, confirm it from the manufacturer's selectivity tables.
8	4 circuit(s) have no cable length given; their voltage drop is not checked.
9	1 circuit(s) are not checked for earth fault disconnection: no cable length, a motor starter's breaker, or a breaker not selected here.
10	Each cable's withstand k^2S^2 is in the cable list; compare it with the selected breaker's let-through I^2t at 10 kA from its maker's curve (ABB handbook §2.4).
11	Cables sized for method B1, 30 °C, 1 grouped circuit(s), 70 °C insulation.
12	Designed for Palestine, under IEC 60364 (adopted by the Palestine Standards Institution): its stated limits apply beneath the company's own settings.
13	Circuit rules are this software's defaults, not confirmed by the company's engineers.
14	Enclosure: ABB Mini Center compact GDMS348 RX (2CVA360001P0001), 3 rows of 16 modules, H x W x D 648 x 400 x 117 mm, IP41, busbar 200/250 A, 35 kA; 31 modules are left for spare ways (ABB Distribution Boards catalogue (1SKC802027C0201), Mini Center compact, pp. 5, 7). The outgoing terminal strip is not counted.

Company	Project	Job number	Board	Title of page	Rev.
	TEST-POOL-01 (assessment t…	TEST-0001	TEST-DB-POOL	**Design notes**	
Date	**Drawn**	**Checked**	**Approved**	**Page**	
				6 of 10	

Incomer: 70 mm of rail



Residual current group: 175 mm of rail

Busbar: 52.5 mm of rail

Terminals: 0 mm of rail; 14 without a width

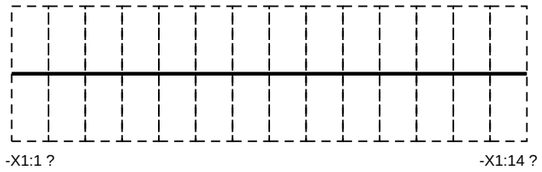

Dashed: no width is given for the device's kind (rail_widths_mm in the company settings).

Company	Project	Job number	Board	Title of page	Rev.
	TEST-POOL-01 (assessment t…	TEST-0001	TEST-DB-POOL	**Layout**	
Date	**Drawn**	**Checked**	**Approved**	**Page**	
				7 of 10	

Terminal	Conductor	Circuit	Cable	mm²	Article
-X1:1	L3	Underwater light	-W1	1.5	8WH1000-0AF00
-X1:2	N	Underwater light	-W1	1.5	8WH1000-0AF00
-X1:3	PE	Underwater light	-W1	1.5	8WH1000-0CF07
-X1:4	L2	Plant room socket	-W2	2.5	8WH1000-0AF00
-X1:5	N	Plant room socket	-W2	2.5	8WH1000-0AF00
-X1:6	PE	Plant room socket	-W2	2.5	8WH1000-0CF07
-X1:7	L1	Water heater	-W3	1.5	8WH1000-0AF00
-X1:8	N	Water heater	-W3	1.5	8WH1000-0AF00
-X1:9	PE	Water heater	-W3	1.5	8WH1000-0CF07
-X1:10	L1	Filtration pump	-W4	1.5	8WH1000-0AF00
-X1:11	L2	Filtration pump	-W4	1.5	8WH1000-0AF00
-X1:12	L3	Filtration pump	-W4	1.5	8WH1000-0AF00
-X1:13	N	Filtration pump	-W4	1.5	8WH1000-0AF00
-X1:14	PE	Filtration pump	-W4	1.5	8WH1000-0CF07

Company	Project	Job number	Board	Title of page	Rev.
	TEST-POOL-01 (assessment t…	TEST-0001	TEST-DB-POOL	**Terminals**	
Date	Drawn	Checked	Approved	Page	
				8 of 10	

Cable	From	To	Type	Length
TEST-DB-POOL -W1	TEST-DB-POOL -Q3	Underwater light	3G1.5 Cu PVC	
TEST-DB-POOL -W2	TEST-DB-POOL -Q4	Plant room socket	3G2.5 Cu PVC	
TEST-DB-POOL -W3	TEST-DB-POOL -Q5	Water heater	3G1.5 Cu PVC	
TEST-DB-POOL -W4	TEST-DB-POOL -Q6	Filtration pump	5G1.5 Cu PVC	

Company	Project	Job number	Board	Title of page	Rev.
	TEST-POOL-01 (assessment t…	TEST-0001		**Cable list**	
Date	Drawn	Checked	Approved	Page	
				9 of 10	

Qty	Description	Article	Order number	Devices
1	Circuit-breaker C63 4P 10 kA	not selected		-Q1
1	Circuit-breaker C32 3P 10 kA	not selected		-Q2
1	Residual current circuit-breaker 40 A 30 mA 4P	not selected		-F1
1	Circuit-breaker D13 3P 10 kA	not selected		-Q6
1	Circuit-breaker C10 1P 10 kA	not selected		-Q3
2	Circuit-breaker C16 1P 10 kA	not selected		-Q4, -Q5
10	Terminal 8WH1	Siemens 8WH1000-0AF00	8WH1000-0AF00	TEST-DB-POOL -X1
4	PE terminal 8WH1	Siemens 8WH1000-0CF07	8WH1000-0CF07	TEST-DB-POOL -X1

Company	Project	Job number	Board	Title of page	Rev.
	TEST-POOL-01 (assessment t…	TEST-0001		**Parts list**	
Date	Drawn	Checked	Approved	Page	
				10 of 10	